

CONTACT YOUR DISTRIBUTOR OR PARTS SUPPLIER
WITH QUESTIONS ABOUT THE SYSTEM.

IMPORTANT INFORMATION

The newly-installed Piano Life Saver System will alter the piano's wood moisture content and, therefore, alter the tuning. Ideally, the Dampp-Chaser System should be installed three weeks **BEFORE** the piano is tuned.

WARNING: Installation of the Piano Life Saver System must be made by a professional Piano Technician or Tuner. Any warranties stated or otherwise implied are void if the installation is made by someone other than a professional Piano Technician or Tuner.



Representative for all European countries:

Odd Aanstad

Boda Asen, SE-671 95 Klässbol, Schweden

Tel.: 0046 5705 1184, Fax: 0046 5705 1194 • e-mail: europe@dampp-chaser.com

DAMPP-CHASER CORPORATION

Post Office Box 1610

Hendersonville, North Carolina 28793

828-692-8271 • Fax: 828-692-8272 • e-mail: piano@dampp-chaser.com

www.PianoLifeSaver.com

INSTALLATION INSTRUCTIONS

INSTALLATION TOOLS REQUIRED:

You will need the tools listed on the Grand Piano Installation Instructions
 and also a pair of pliers and scissors.

IMPORTANT INFORMATION:


These instructions apply only to the connections between the two tanks and to special installation requirements. For the basic Humidifier installation instructions, please refer to the sections on **Planning the Installation** and **Humidifier Installation** in the grand piano installation instructions.

Components:

- (2) Universal Humidifier tanks with 16 mm elbows
- (1) 16 mm x 1,2 m long vinyl tube.
- (2) Metal locking rings.
- (1) Velcro set.

System Description


With this System two Humidifier tanks are joined by means of a large diameter tube. As one tank is being filled, it drains into the other tank until the levels in both tanks are the same. Throughout usage, the water level in both tanks will remain the same. The low water warning light will blink when the level in both tanks drops below the probes located in just one of the tanks. There is just one fill tube for the interconnected System.

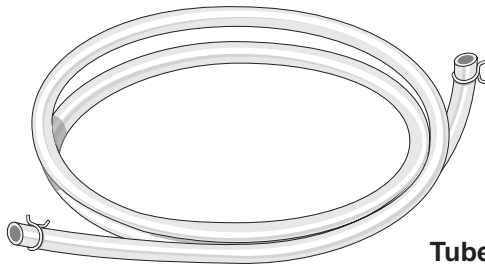


Tube with
locking rings
on each end.



Locking Rings

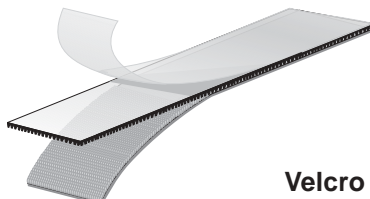

Velcro

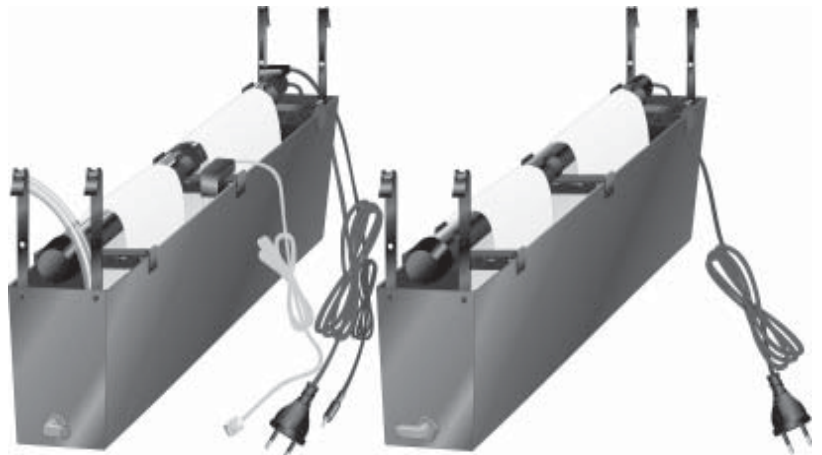


Humidifier Tanks

17 cm tall x 35 cm long x 9 cm wide

Install the Humidifier tanks after having read the sections in the grand piano installation instructions referred to on page 1.

STEP 1

Make sure the elbow openings are facing each other before putting them into the piano. They were supplied to you so that when installed properly they will be facing each other.

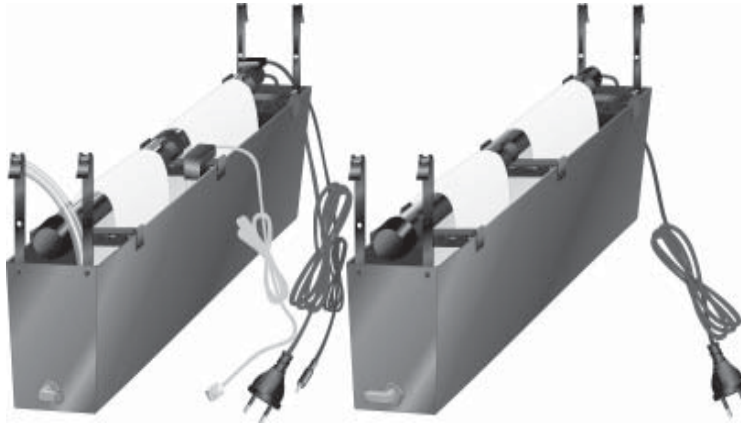

If they are not facing each other, move the tanks so that they are. The electrical cords from the Humidifier heater bars are normally toward the front of the piano; however, they can be toward the rear if the Humidistat will be located toward the rear.


WARNING

Do not tighten or loosen the elbows. They are sealed at the factory to make sure they do not leak. Tightening or loosening will destroy this seal.


STEP 2

Make sure the bottom of the tanks are the same height. If they are not, they will not function properly; i.e. the water will not move properly between tanks.


The sketches below show incorrect and correct orientations.




Incorrect - one tank empties into the other. Lower tank is overfilled. Upper tank is underfilled.



Incorrect - water does not get from one tank to another.



Incorrect - Can look unsightly hanging down.



Correct - water flows well between the 2 tanks. The tube presumably is attached to a beam and travels level between the 2 tanks.

STEP 3

Do not connect the tube to the tanks yet, but route it between them so that it stays level. Once you have the best level route, mark the tube for cutting, making absolutely sure there is enough to go over both elbows.

STEP 4

Before cutting the tube, notice that one of the locking rings will need to be moved inward, beyond the mark for the cut. Use pliers to squeeze open this locking ring and move it into position. The prongs should be facing down.

STEP 5

Slip one tube end over the elbow on each tank. It is a good idea to do this outside the piano in order to provide adequate support for the elbows. A little water on the inside of the ends of the tube will provide some lubricant to enable the tube end to slip over the elbow. **It is important that you support the elbow when pushing on it to avoid breaking the seal between the elbow and the tank.**

STEP 6

With the pliers, squeeze open the locking rings and move them forward on the tube until they are over the elbows.



STEP 7

Using the Velcro provided, create a "sling" to support the tube.




STEP 8

Install the Humidifiers according to the grand System instructions. Two power strips are included with the dual tanks (**see drawing below**). Install one of the power strips near the Humidistat outlet marked **HUMIDIFIER**. Then plug both Humidifier heater bars into the power strip.

STEP 9

Install the Dehumidifiers according to the grand System instructions. Install the other power strip near the Humidistat and plug it into the Humidistat outlet marked **DEHUMIDIFIER**. Then plug all Dehumidifiers into the power strip.

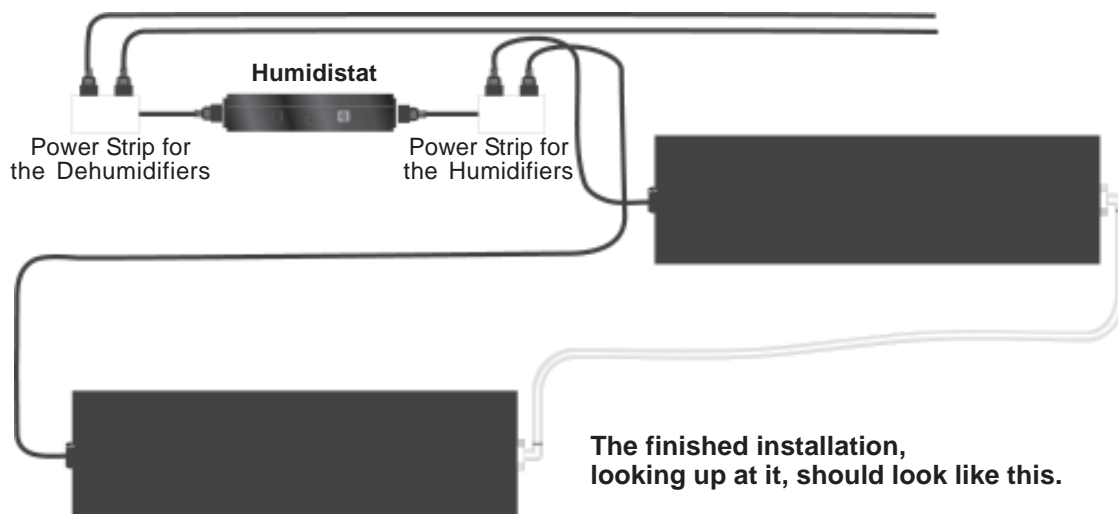

STEP 10

Tank Filling Information:

Dual Universal Tanks

Initially

2 Cans

Subsequently

2 Cans